

6 Stück

Nylon air breather filter

02773 91774

Series TAP 90

Ordering information

Breather filter	1	2	3	4	5	6
TAP90	<input checked="" type="checkbox"/> G	<input checked="" type="checkbox"/> 10	<input checked="" type="checkbox"/> 0	<input checked="" type="checkbox"/> 1	<input checked="" type="checkbox"/> L	<input checked="" type="checkbox"/> P01
Example: TAP90	G	03	0	1	L	P01

1 - Connection to reservoir

<input checked="" type="checkbox"/> G	M52x2
<input checked="" type="checkbox"/> H	G 1 1/2"
<input checked="" type="checkbox"/> L	G 1 1/4"
<input checked="" type="checkbox"/> M	3/4" NPT
<input checked="" type="checkbox"/> N	1" NPT
<input checked="" type="checkbox"/> Q	G 3/4"

2 - Filter element

<input checked="" type="checkbox"/> 03	3 µm - Impregnated paper
<input checked="" type="checkbox"/> 10	10 µm - Polyurethane

3 - Seal

<input checked="" type="checkbox"/> S	Without
<input checked="" type="checkbox"/> A	NBR (pressurised)

4 - Pressurisation valve

<input checked="" type="checkbox"/> X	Without
<input checked="" type="checkbox"/> 1	0,3 bar pressurisation valve
<input checked="" type="checkbox"/> 2	0,7 bar pressurisation valve


5 - Variants

<input checked="" type="checkbox"/> X	Standard
<input checked="" type="checkbox"/> A	With Dipstick
<input checked="" type="checkbox"/> L	With Padlock tab
<input checked="" type="checkbox"/> F	With Dipstick and Padlock tab

6 - Options

<input checked="" type="checkbox"/> P01	MP Filtr standard
---	-------------------

TAP 90 G
With filter

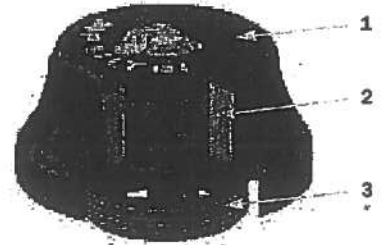

TAP90 (Materials)

- 1 - Cover/ringnut: Nylon
- 2 - Breather filter: Impregnated paper Polyurethane
- 3 - Seal: NBR

Flow rate with $\Delta p: 0,02$ bar


Filtration	I_N /min
3 µm	450
10 µm	550

Weight

TAP 90: 0,130 Kg


Dimensions

TAP 90 for connection on weld flange

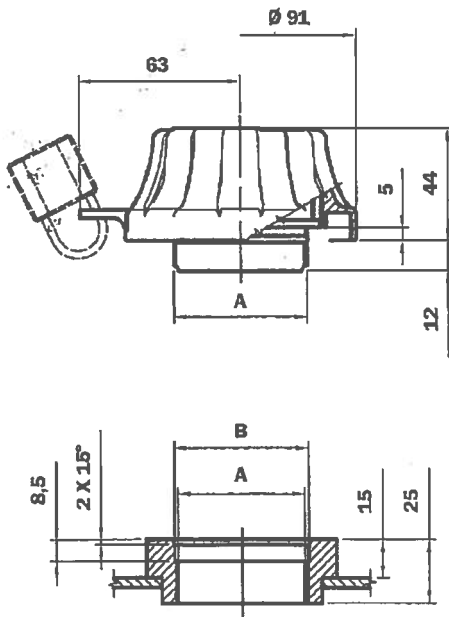

	A	B
G	M52x2	Ø 52,5
H	G 1 1/2"	Ø 48,5
L	G 1 1/4"	Ø 42
M	3/4" NPT	
N	1" NPT	
Q	G 3/4"	

TAP G
With Pressurisation



TAP G
With Dipstick

